



DUAL PARALLEL CURB RAMPS

NOTES:


1. WHEN CONSTRUCTING TWO PARALLEL RAMPS ON A SINGLE RETURN THERE SHALL BE A MINIMUM 3' SPACE BETWEEN THE TOP OF RAMPS.
2. THE CURB HEIGHT CAN BE REDUCED FROM 6" TO 3" TO MAINTAIN ADA COMPLIANT RAMPS AND ACCOMMODATE THE 3' SPACE.
3. ALL OTHER CONSTRUCTION NOTES FROM STANDARD DETAIL F1 SHALL APPLY.

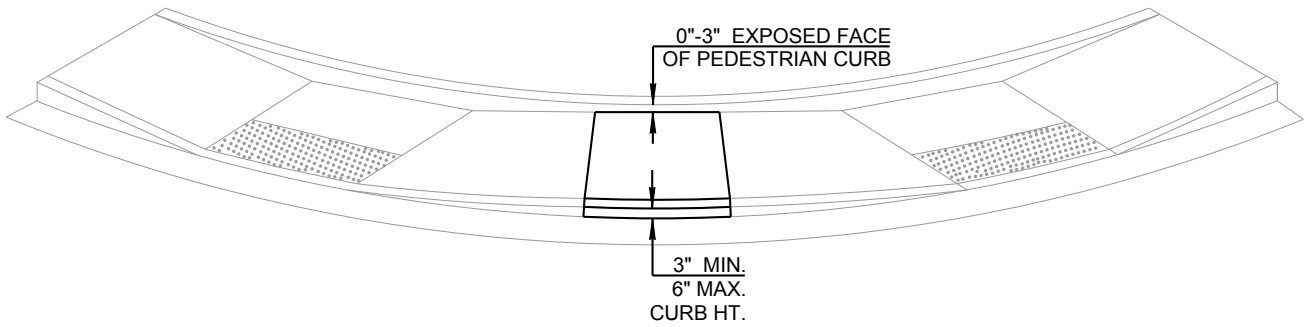

ISOMETRIC VIEW

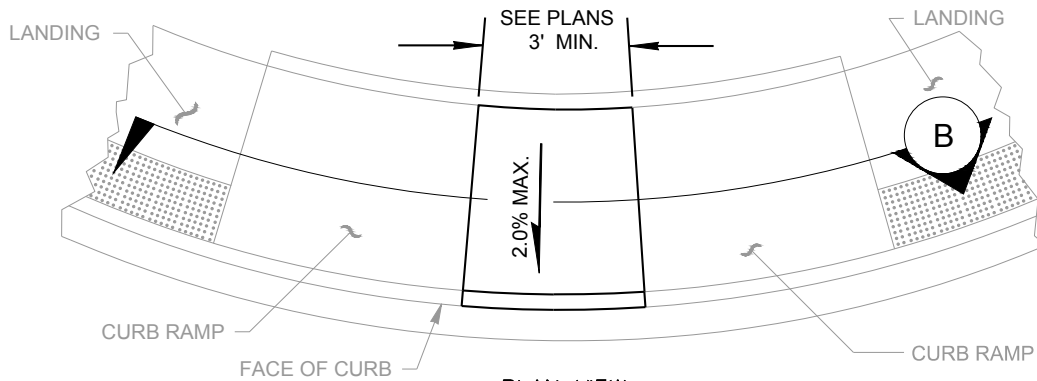

PLAN VIEW

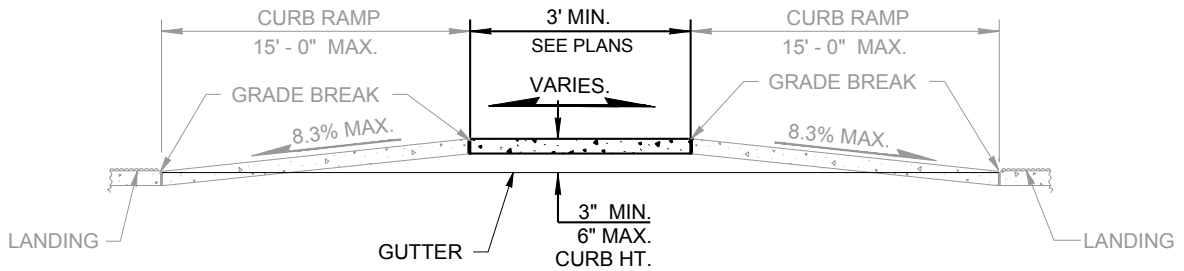

SECTION B

NO.	REVISIONS	DATE	BY

DWG: F2A.DWG



Department of
Public Works
CLARK COUNTY
WASHINGTON
proud past, promising future

DUAL PARALLEL CURB RAMPS

[Signature]
APPROVED
COUNTY ENGINEER

01/26/16
DATE

STANDARD
F2a
DETAIL
DESIGNED
DRAWN
DATE 01/26/16